

LED MR11 LAMP

Single lens with replaceable optics



With 4 different beamspreads for highlighting the texture of an accent piece, making a tree stand out against a dark night, or brightening your patio for outdoor entertaining, Illumicare's MR11 lamps are the only outdoor-rated, retrofit LEDs to offer all of these possibilities in one product.



ONE LAMP


4 BEAM SPREADS!
15°, 30°
45° & 60°



Our MR11 LED lamps fit into hundreds of existing landscape and commercial lighting fixtures enabling immediate, seamless replacement. Easily update the beam spread by using the supplied tool to remove the face of the lamp and replace the optic with your choice of 15, 30, 45 or 60 degrees. In just a few seconds, you can create a completely different lighting effect.

Our fully-stepped LED IC driver and unique thermal control ensure our MR11 lamp is capable of operating at temperatures well below the heat specifications of most leading LED Chips, even sealed in weatherproof fixtures. A focus on reduced lamp failures ensures you are buying the most durable MR11 LEDs available in the outdoor lighting industry.

- Popular base types
- Conventional lamp shapes
- Fully-stepped IC driver
- Completely encapsulated driver
- Consistent lumen output
- Unique thermal control

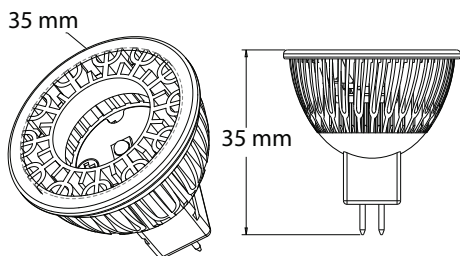

5 YEAR
Warranty

Available Color Temperatures

LED MR11 VWW-1545	2700K Very Warm White
LED MR11 WW-1545	3000K Warm White

Specifications:

Input Voltage	Output Power	Operating Temperature	Operating Environment	L70
12V AC or DC (9-15V AC/DC)	4W	35-40°C (95-104°F)	-20-40°C (-4-104°F)	40,000 Hours
Base	Luminous Flux	Color Temperature (CCT)	Beam Spreads	CRI
GU10/GZ10 Bipin Base	220-250lm	2700K, 3000K	15°, 30°, 45°, 60°	85%